

溫度.濕度.露點控制器

Temp. / Humidity / Dew Point Control Meter



附件

CHD - 3 - 2 Relay 2 sets
CHD - 3 - 4 Relay 4 sets



Features

- CHD 系列精密度：±0.5°C, ±3% (Option：±0.3°C, ±2%)
- Relay 動作可任意選擇溫度或濕度
- 量測溫度. 濕度. 露點
- 兩組或四組繼電器輸出, RS485輸出
- Sensor 長度：標準 1米, 可訂製至 15米

Specifications

- Display** : LED 0.3" high
- Max. Display** : 4 digits
- Conversion Rate** : 1/sec.
- Isolation** : Input / Output/ Power
- Memory** : EEPROM
- Accuracy** : ±0.5°C, ±3% FS.
±0.3°C, ±2% FS.(option)
- Operating Temp.** : 0~60°C/ below 80%R.H.
- Storage Temp.** : -10~70°C/ below 70%R.H.
- Power Supply** : AC 90~260V, 50/60Hz
Option : DC 24V
- Power Consumption** : Approx. 4VA
- Insulation Resistance** : More than 100MQ at 500VDC
- Dimensions** : 96(W) x 48(H) x 112.5(D)mm
- Panel Cut-Out** : 91.4(W) x 44(H)mm

Connection Diagram

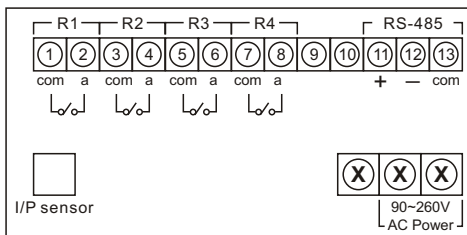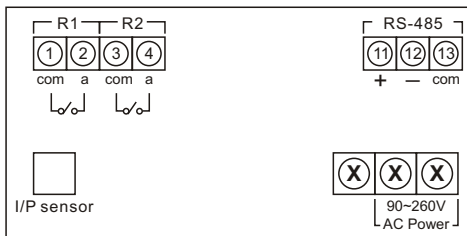

Input

- Temp.** : -30.0 ~ 80.0°C
- Option** : -30.0 ~ 120.0°C
- Humidity** : 0 ~ 100.0%


Relay Output

- Control System** : Microcomputer
- Setting Range** : Free setting
- Temp.** : -30.0 ~ 120.0°C
- Humidity** : 0 ~ 100.0%
- Relay Contact Capacity** : AC 250V, 5A resistive load
DC 30V, 5A resistive load

RS-485 Interface

- Address** : 1 ~ FF (16Hex)
- Baudrate** : 9600, 19.2K, 38.4K, 57.6K, 115.2K
- Frame** : N.8.2, E.8.1, O.8.1, N.8.1
- Protocol** : Modbus RTU Mode

Order Code

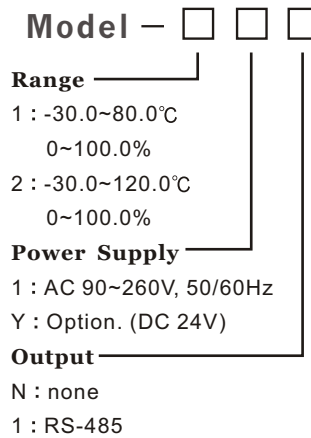

Dimensions

